


SWL-Series - Valve Regulated Lead Acid Battery SWL750 (FR)

SPECIFICATIONS		
Nominal voltage	12	V
10-min rate Constant Power to 9.6V at 20°C	750	Watts
10-min rate Constant Power to 1.6V/cell at 20°C	125	Watts
10-hr rate Capacity to 10.8V at 20°C	22.9	Ah
DIMENSIONS		
Length	166 (±0.5)	mm
Width	175 (±0.5)	mm
Height	125 (±0.5)	mm
(height over terminals)	N/A	mm
Mass (typical)	9.0	kg
TERMINAL TYPE		
Female threaded terminal	M5	mm
Torque	2.5	Nm
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL 94:HB)	
Flame retardant option (FR)	ABS (UL94:V0)	
CHARGE VOLTAGE		
Float charge voltage at 20°C	13.65 (±1%)	V
	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14.5 (±3%)	V
	2.42 (±3%)	V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	A
Cyclic (or Boost) charge current limit	11.45	A
MAXIMUM DISCHARGE CURRENT		
1 second	500	A
1 minute	150	A
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE (according to EN IEC 60896-21)		
Internal resistance	20.47	mΩ
Short-Circuit current	714	A
IMPEDANCE		
Measured at 1 kHz	9.5	mΩ
Refer to the technical manual	SWL	
DESIGN LIFE		
EUROBAT Classification: High Performance	10 to 12	years
Yuasa design life (at 20°C)	up to 10	years
PERFORMANCE & CHARACTERISTICS		
SAFETY		
Installation		
Can be installed and operated in any orientation except permanently inverted		
Handles		
Batteries must not be suspended by their handles (where fitted)		
Vent valves		
Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.		
Gas Release		
VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container		
Recycling		
YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations		



LAYOUT

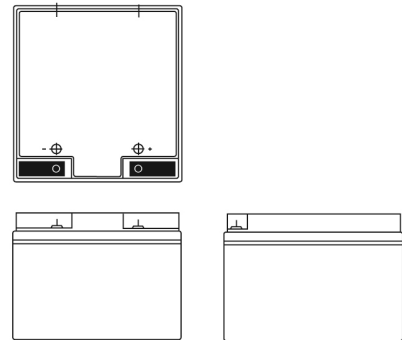

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems
 ISO 14001 - Environmental Management Systems
 EN 18001 - OHSAS Management Systems
 TL4423-6 by DeTeImmobilien
 UNDERWRITERS LABORATORIES Inc.



STANDARDS

IEC61056
 IEC60896-21/22



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE
 Issue No.: V.3 / Issue Date: March 2011

